

Casambi Relaissteuerung

Smartes Steuern von zwei unabhängigen Schaltkreisen im Casambi Netzwerk



Artikelnr.: 1022 / ArtikelNr.: 1022H (Montage im Schaltschrank / Hutschiene)


Beschreibung

Die AIMOTION Relaissteuerung steuert bis zu zwei Leuchten und Geräte im Bluetooth Low Energy Mesh-Netzwerk, ohne die Verwendung von Gateways, Routern, Repeatern oder einer extra Verkabelung. Die Konfiguration erfolgt drahtlos über die Casambi App. Die Installation darf nur von einem qualifizierten Elektriker ausgeführt werden.

- Drahtlose Steuerung per App, Wandschalter und Bewegungsmelder
- Automatisches Ein- und Ausschalten nach Uhrzeiten, Wochentagen, Datum oder Sonnenzeiten
- Potenzialfreies Schalten möglich
- Gruppenfunktion
- Integration in Szenen und Animationen
- iBeacon aktivierbar

Technische Daten

Beschreibung	Eigenschaften
Eingangsspannungsbereich AC	230 V AC
Frequenz	50/60 Hz
Maximale schaltbare Leistung	Relais 1: 1500 W (AC) / 165 W (DC) Relais 2: 1500 W (AC) / 165 W (DC)
Schaltausgang	220-240 VAC / 50 Hz
Standby-Verbrauch	0,15W
Anschluss Querschnitt	Max. 1,5mm ²
Schutzart	IP20
Schutzklasse	II
Schaltzyklen	50.000
Temperaturbereich	-20 C° - +50 C°
Max. Gehäusetemperatur	60° C
Lagertemperatur	-25 C° - +75 C°
Gewicht	62 g
Maße	143 x 38 x 27mm

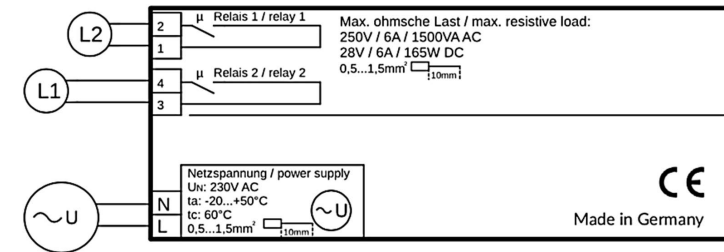

Konformitätserklärung:

Hiermit erklärt die AIMOTION GmbH, dass sich das Produkt Relaissteuerung in Übereinstimmung mit der Richtlinie 2014/53/EU befindet. Die ausführliche Konformitätserklärung finden Sie unter <https://www.aimotion-smartliving.de/de/support/download/> in der Produktkategorie Schaltfaktoren.

Technische Änderungen und Irrtümer vorbehalten. 07.2021.



Casambi Relay Control

Smart control of two independent circuits in Casambi network



Article no.: 1022 / Article no.: 1022H (mounting on DIN rail)


Description

The AIMOTION relay controller controls up to two luminaires and devices on the Bluetooth Low Energy Mesh network without the use of gateways, routers, repeaters or extra cabling. Configuration is wireless via the Casambi App. The installation must only be carried out by a qualified electrician.

- Wireless control via app, wall switch and motion detector
- Automatic switching on and off according to time, weekday, date or sunshine
- Potential-free switching possible
- Group function
- Integration in scenes and animations
- iBeacon can be activated

Technical Details

Description	Features
Input voltage range	230 V AC
Frequency	50/60 Hz
Maximum switchable power	Relais 1: 1500 W (AC) / 165 W (DC) Relais 2: 1500 W (AC) / 165 W (DC)
Switching output	220-240 VAC / 50 Hz
Degree of protection	IP20
Protection class	II
Stand-by consumption	0,15W
Wire range,	Max. 1,5mm ²
Switching cycles	50.000
Ambient temperature, ta	-20 C° - +50 C°
Max. housing temperature	60° C
Storage temperature	-25 C° - +75 C°
Weight	62 g
Dimensions	143 x 38 x 27mm

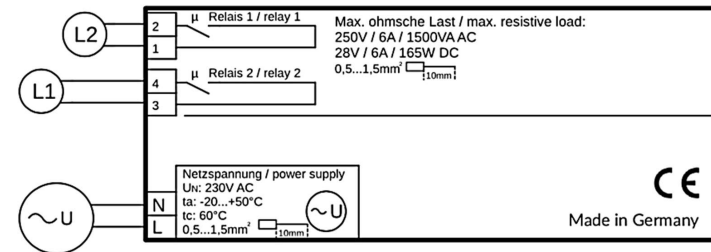

Declaration of Conformity:

Hereby AIMOTION GmbH declares that the product Push/Switch Actuator is in compliance with Directive 2014/53/EU. The detailed declaration of conformity can be found at <https://www.aimotion-smartliving.de/en/support-en/download/> in the product Switching Actuators.

Technical changes and errors excepted. 07.2021.

